


# 4000 L

## Solar Screen Fabric

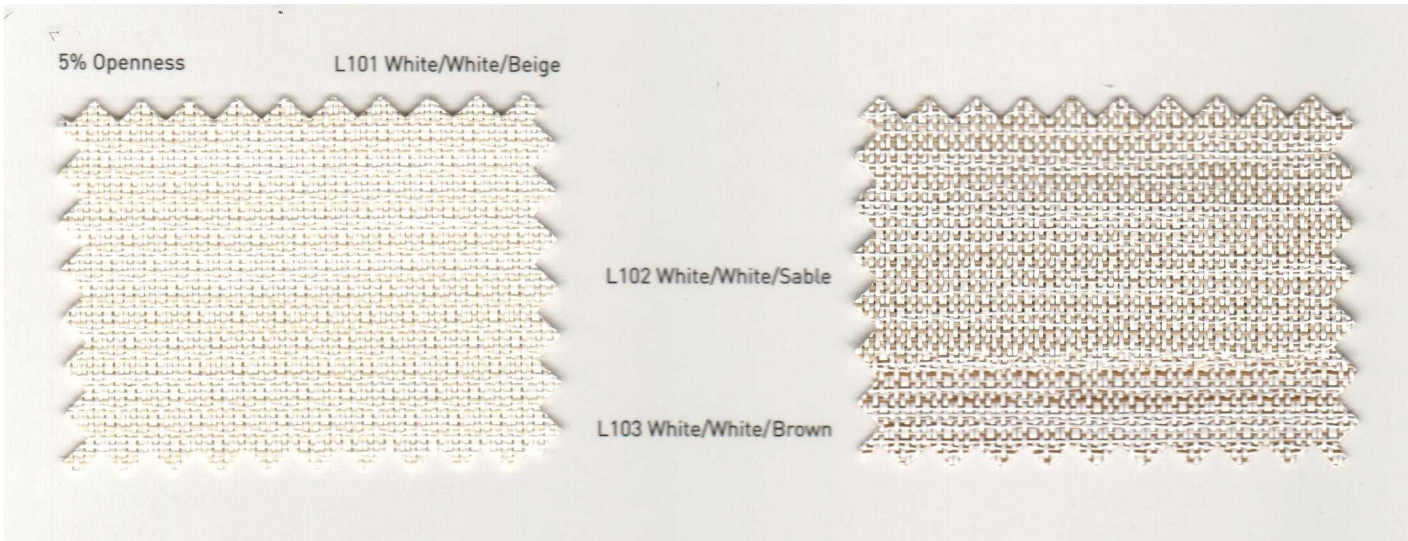

### SPECIFICATIONS

	VIEW R 15%	4000 L 5%	4700 P <1%
Composition	27% Polyester, 73% PVC	27% Polyester, 73% PVC	20 Polyester, 80% PVC
Openness Factor	15%	5%	<1%
Weight	13.42 oz/yd2 (455 g/m2)	13.12 oz/yd2 (445 g/m2)	18.58 oz/yd2 (630 g/m2)
Thickness	0.032 in (.83mm)	0.025 in (.65mm)	0.035 in (.9mm)
Colorfastness	Grade 8	Grade 8	Grade 8
Standard width	98.4" (2.5m)	98.4" (2.5m)	98.4" (2.5m)
Standard length	33 yd/roll (30m)	33 yd/roll (30m)	33 yd/roll (30m)
Fire Classifications	NFPA 701, CA Title 19	NFPA 701, CA Title 19	NFPA 701, CA Title 19
Environmental Standards	Greenguard and Greenguard Gold	Greenguard and Greenguard Gold	Greenguard and Greenguard Gold

For complete technical information, current test results, performance specifications, or larger samples, please contact customer service.

